



"Simply Better Drainage!"

www.herbish.co.za

Herbish® Drainage Systems has been involved in the design and manufacture of stainless steel floor drains, grease traps, strip channels, shower channels, and linear floor channels for over 20 years.

Specified by architects, engineers and plumbers, our comprehensive range provides high quality drainage solutions requiring minimum maintenance and offering maximum corrosion resistance.

10	HB SHOWER FLOOR CHANNEL RANGE	01
11	HB KEY SLOT FLOOR CHANNEL RANGE	03
12	HB250 HEAVY DUTY FLOOR CHANNEL RANGE	05
13	HB350 HEAVY DUTY FLOOR CHANNEL RANGE	07
14	HB BIN WASH FLOOR DRAIN RANGE	09

Note: In our quest to continuously improve our products, some designs and sizes may be slightly adjusted.



HBSC

SHOWER CHANNELS

The Herbish® Shower Channel range is attractive and discreet and incorporates, in addition to standard features such as floor and wall water proofing flanges, levelling brackets and screws to facilitate installation. The channel is installed flush with the floor improving safety of foot traffic and by using lock down screws, the channel is practically tamper proof.

Designed in collaboration with leading architects and are available in a range of aesthetically pleasing cover designs as standard, but may be adapted to the Client's specifications with respect to drain position, cover design and length.

Our Channels may be used in many applications such drainage at point of access, bathrooms, outdoor drainage, on timber and pool decks and where level access solutions is a requirement.

Manufactured entirely of 304ss, they are corrosion resistant and hygienic. Depending on Client's requirements they may be manufactured in 316ss and in thicker material to suit loading.

APPLICATIONS

- Designed for both domestic and commercial applications
- Attractive and discreet
- Can be used for drainage at point of access, bathrooms, outdoor drainage and timber/pool decks etc.

MATERIALS & FINISHES

- Manufactured in 304 and 316 grade stainless steel
- 4 stylish grate options
- A choice of horizontal or vertical outlets
- Supplied standard with levelling bolts and anchoring ties

PERFORMANCE

- Excellent corrosion resistance
- Hygienic
- High flow rate performance

INSTALLATION

- The channel incorporates an integral fall which can be designed to the project requirements

HBSC TYPE A



SHOWER CHANNEL DIMENSIONS

A	Channel Width	160mm
B	Support Edge Width	20mm
C1	Channel Height	*
C2	Channel Height	*
D	Channel Lid Width	*
E	Channel Lid Length	*
F	Channel Support Edge Total Width	*
G	Channel Support Edge Total Length	*
H	Drain Height	120mm
I	Drain Width	100mm
J	Outlet Diameter	50mm*

HBSC TYPE B



SHOWER CHANNEL DIMENSIONS


A	Channel Width	160mm
B	Support Edge Width	20mm
C1	Channel Height	*
C2	Channel Height	*
D	Channel Lid Width	*
E	Channel Lid Length	*
F	Channel Support Edge Total Width	*
G	Channel Support Edge Total Length	*
H	Drain Height	120mm
I	Drain Width	100mm
J	Outlet Diameter	50mm*
K	Waterproofing Flange Height	*
L	Waterproofing Flange Width	*

(Client Specification*
Optional Outlet Diameter Available on Request*)




SHOWER CHANNELS

HBSC




HBSC TYPE A
"Support Edge"

Support edge with addition fold
provides facility to
receive and support floor finishes.




HBSC CHANNEL TYPE B
"Support Edge + Waterproofing Flange"

Support edge with addition fold
provides facility to
receive and support floor finishes.

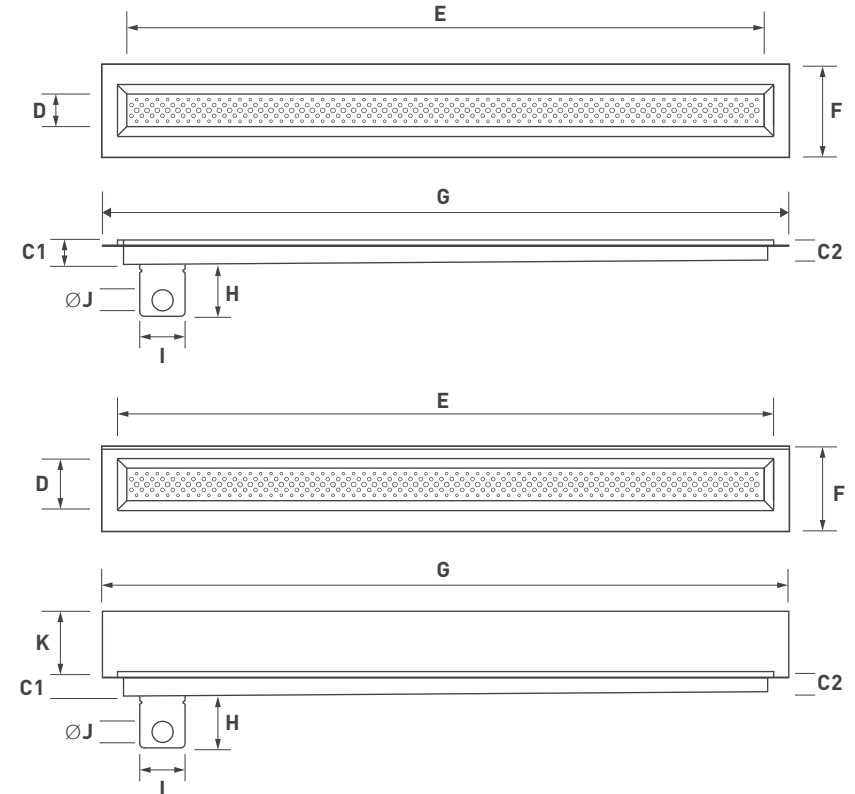

GRATING DESIGN OPTIONS

(Client specification* Custom gratings can be manufactured on request)

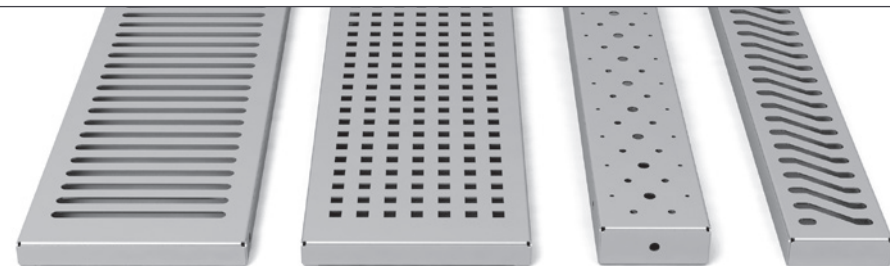


Standard
Slotted

Square
Perforation*

Round
Perforation*

Angle
Slotted*

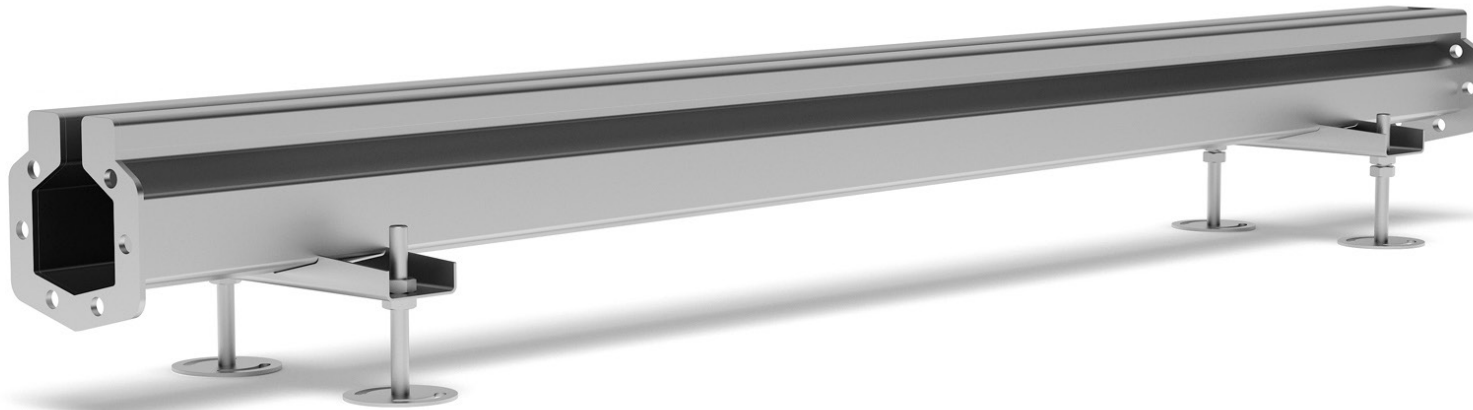

HBKSC

KEY SLOT CHANNELS

With ever increasingly tighter legislation and demands on our environment, it is imperative to improve on the way we deal with water resources. Herbish® Drainage Systems tried and tested key slot channel meets this demand.

Manufactured in 304ss, it offers hygienic construction and above average finish.

KEY SLOT CHANNELS ARE FULLY CUSTOMISABLE

- Length
- Fall: 1:100 is standard
- Width
- Drain position
- T and L joints
- Edge design
- Custom floor drain

APPLICATIONS

- Designed for both domestic and commercial applications
- Attractive and discreet
- Can be used for wet room and shower areas, breweries and distilleries, storm water management for balconies and entrances

MATERIALS & FINISHES

- Manufactured in 304 and 316 grade stainless steel
- 4 stylish grate options
- A choice of horizontal or vertical outlets
- Supplied standard with levelling bolts and anchoring ties

PERFORMANCE

- Excellent corrosion resistance
- Hygienic
- High flow rate performance

INSTALLATION

- The channel incorporates an integral fall which can be designed to the project requirements
- Levelling screws help support positioning

HBKSC



KEY SLOT CHANNEL DIMENSIONS

A	Channel Width	60mm
B	Key Slot Width	10mm
C1	Channel Height	75mm
C2	Channel Height	*
D	Channel Length	*
E	Channel Drain Length	150mm
F	Channel Drain Width	150mm
G	Channel Drain Total Height	190mm
H	Outlet Diameter	50mm/76mm*

(Client Specification* Optional Outlet Diameter Available on Request*)


KEY SLOT CHANNEL COMMON LAYOUTS



"STRAIGHT" SECTION



"T" SECTION*



"L" SECTION*





"U" SECTION*

(Client Specification*)



KEY SLOT CHANNELS

HBKSC

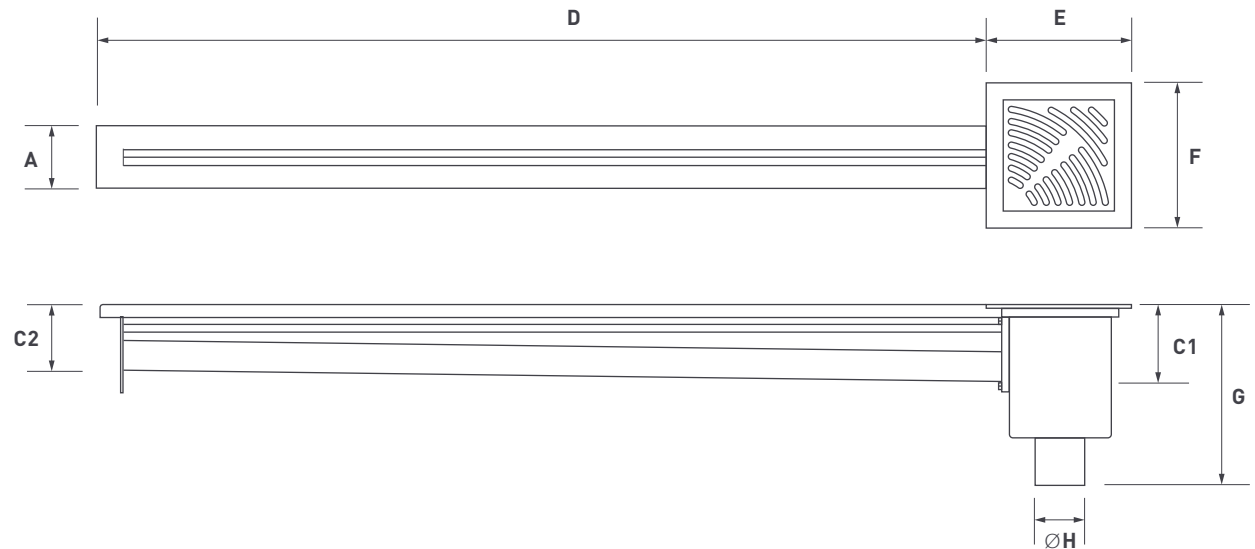



HB250C

HEAVY DUTY CHANNELS

Herbish® HB250 floor channels are designed for applications where waste water is drained directly into the sewer system, making them ideal for applications such as food processing plants, breweries, and pharmaceutical/chemical plants.

Our channels are made from Grade 304 or Grade 316 Sheets and have an in-built fall. The channels are also fitted with levelling screws that help support positioning.

Herbish® HB250 floor channels are also easily configurable. The most typical grating cover for the standard channel is the anti-slip mesh grating there are 4 grating designs available to suit your application.

APPLICATIONS

- Designed for both domestic and commercial applications
- Channels are used to drain high volumes of water and waste
- Channels are very durable and chemical resistant, ideal for industrial applications, offering excellent life-cycle costings

MATERIALS & FINISHES

- Manufactured in 304 and 316 grade stainless steel
- 3 stylish grate options
- A choice of horizontal or vertical outlets

- Supplied standard with levelling bolts and anchoring ties

PERFORMANCE

- Excellent corrosion resistance
- Hygienic
- High flow rate performance
- Drain is SANS10400 compliant 75mm ABS water seal
- Drain supplied with ABS strainer
- No direct access to the sewer line during routine maintenance

INSTALLATION

- The channel incorporates an integral fall which can be designed to the project requirements
- Levelling screws help support positioning

HB250C




HEAVY DUTY CHANNEL DIMENSIONS


	HB250C-A	HB250C-B	HB250C-C
A	250mm	250mm	250mm
B	150mm	150mm	150mm
C1	*	*	*
C2	*	*	*
D	*	*	*
E	*	*	*
F	*	*	*
G	190mm	190mm	190mm
H	50mm/110mm*	50mm/110mm*	50mm/110mm*
I*	50mm	50mm	50mm

[Client Specification* Optional Outlet Diameter Available on Request*]

HB250C COMMON LAYOUTS



"STRAIGHT" SECTION



"T" SECTION*



"L" SECTION*



"U" SECTION*


[Client Specification*]



HEAVY DUTY FLOOR CHANNELS ————— HB250C


HB250C TYPE A "Return Edge"

Return edge provides extra stability to channel edge and a floor finish abutment face.





HB250C TYPE B "Support Edge"

Support edge with addition fold provides facility to receive and support floor finishes.




HB250C TYPE C "Return Tray Edge"

Return tray edge with addition folds provides support to meshed tray option.

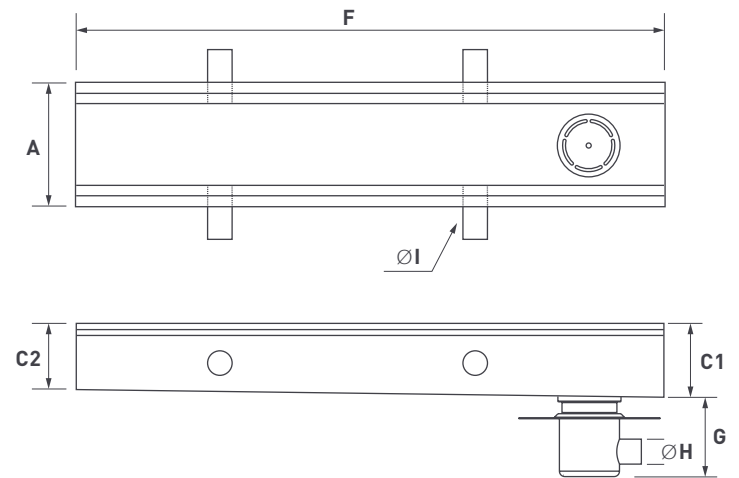

GRATING DESIGN OPTIONS

[Client specification* Custom gratings can be manufactured on request]

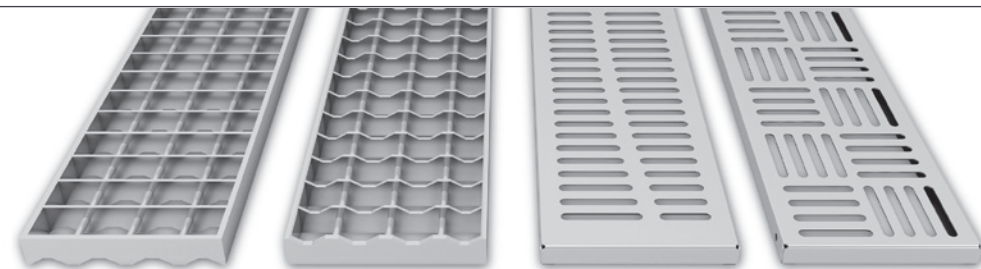


Reversible
Anti-slip

Reversible
Anti-slip

Wave
Slotted*

Smooth
Slotted*

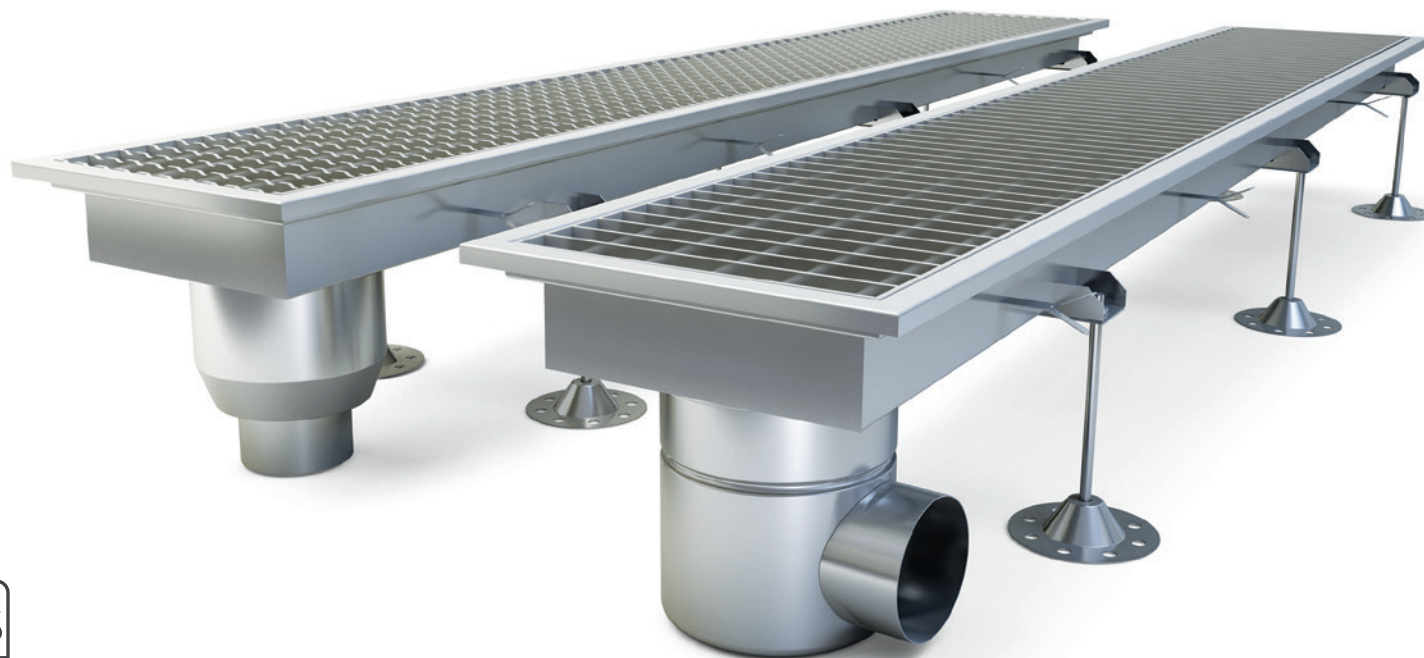

HB350C

HEAVY DUTY CHANNELS

Herbish® HB350 floor channels are designed for applications where waste water is drained directly into the sewer system, making them ideal for applications such as food processing plants, breweries, and pharmaceutical/chemical plants.

Our Channels are made from Grade 304 or Grade 316 Sheets and have an in-built fall. The channels are also fitted with levelling screws that help support positioning.

Herbish® HB350 floor channels are also easily configurable. The most typical grating cover for the standard channel is the anti-slip mesh grating there are 4 grating designs available to suit your application.

APPLICATIONS

- Designed for both domestic and commercial applications
- Channels are used to drain high volumes of water and waste
- Channels are very durable and chemical resistant, ideal for industrial applications, offering excellent life-cycle costings

MATERIALS & FINISHES

- Manufactured in 304 and 316 grade stainless steel
- 4 stylish grate options
- A choice of horizontal or vertical outlets

- Supplied standard with levelling bolts and anchoring ties

PERFORMANCE

- Excellent corrosion resistance
- Hygienic
- High flow rate performance
- Drain is SANS10400 compliant 75mm ABS water seal
- Drain supplied with ABS strainer
- No direct access to the sewer line during routine maintenance

INSTALLATION

- The channel incorporates an integral fall which can be designed to the project requirements
- Levelling screws help support positioning

HB350C




HEAVY DUTY CHANNEL DIMENSIONS


	HB350C-A	HB350C-B	HB350C-C
A	350mm	350mm	350mm
B	250mm	250mm	250mm
C1	*	*	*
C2	*	*	*
D	*	*	*
E	*	*	*
F	*	*	*
G	210mm	210mm	210mm
H	110mm	110mm	110mm
I*	50mm	50mm	50mm

[Client Specification*]

HB350C COMMON LAYOUTS




"STRAIGHT" SECTION



"T" SECTION*



"L" SECTION*



"U" SECTION*

[Client Specification*]




HEAVY DUTY FLOOR CHANNELS

HB350C


HB350C TYPE A "Return Edge"

Return edge provides extra stability to channel edge and a floor finish abutment face.





HB350C TYPE B "Support Edge"

Support edge with addition fold provides facility to receive and support floor finishes.




HB350C TYPE C "Return Tray Edge"

Return tray edge with addition folds provides support to meshed tray option.

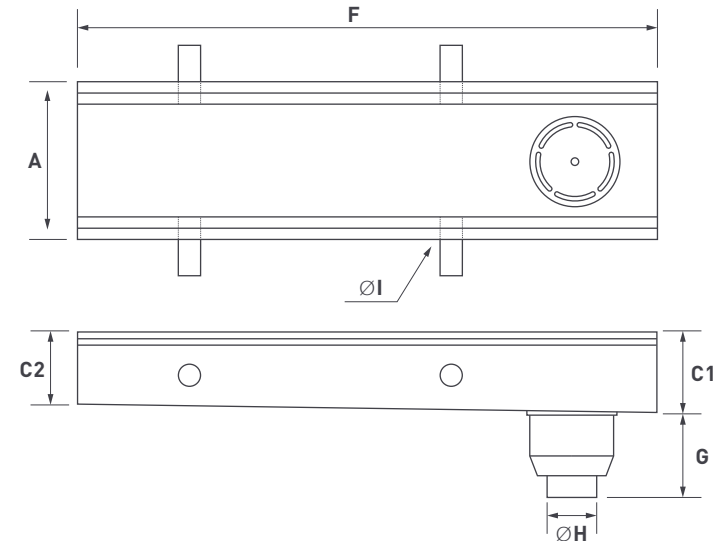

GRATING DESIGN OPTIONS

[Client specification* Custom gratings can be manufactured on request]

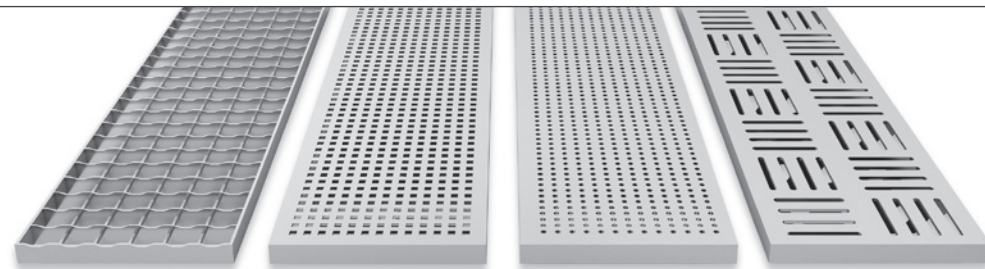

Reversible
Anti-slip

Square
Perforation*

Round
Perforation*

Smooth
Slotted*



HBBW

BIN WASH RANGE

Herbish® HB200 Bin wash range incorporate the proven HB200 design floor drain. The Herbish® bin wash drain, with its tamper proof ability, grate in the outlet pipe and large fines tray, is your solution when designing bin wash areas.

Manufactured in 304ss, this hygienic floor drain may be supplied in 316ss and optionally, with our new Green Drain™ range of hygienic, waterless traps.

BUILDING A BIN WASH AREA

- Roof and bund the garbage bin wash area to exclude rainwater but include the wash water
- Place the garbage bin wash area on a hard surface
- Only use soap-based products to clean the garbage bins
- Discharge wastewater directly to the sewer
- Comply with current water restrictions determined by your local council

MATERIALS & FINISHES

- Manufactured in 304 and 316 grade stainless steel
- A choice of horizontal or vertical outlets
- Supplied standard with ABS plastic basket with and a 75mm ABS plastic water seal
- Supplied standard with a 110mm outlet

PERFORMANCE

- Excellent corrosion resistance
- Hygienic
- High flow rate performance
- SANS10400 compliant 75mm water seal
- No direct access to the sewer line during routine maintenance

INSTALLATION

- Tamper-proof fixings for the cover are standard
- Easy to clean and maintain

VERTICAL OUTLET



DRAIN DIMENSIONS

A	Bin Waste Channel Size	350mm x 350mm
B	Drain Body Diameter	185mm
C	Channel Height	100mm
D	Bin Waste Height	310mm
E	Outlet Diameter	110mm

DRAIN WEIGHT

MODEL	Weight (Kg)
HB200BWV	+/- 11

HORIZONTAL OUTLET



DRAIN DIMENSIONS

A	Bin Waste Channel Size	350mm x 350mm
B	Drain Body Diameter	185mm
C	Channel Height	100mm
D	Bin Waste Height	417mm
E	Outlet Diameter	110mm
F	Outlet Center Height	140mm




DRAIN WEIGHT

MODEL	Weight (Kg)
HB200BWH	+/- 11






BIN WASH FLOOR DRAIN

HB200BWV

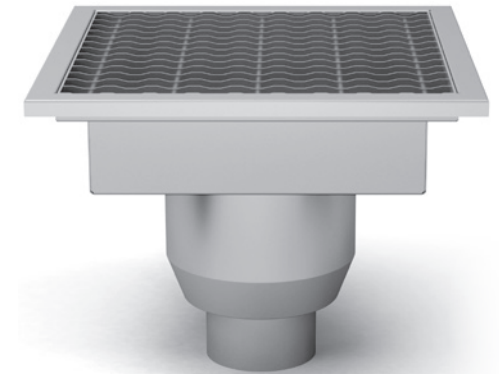



BIN WASH FLOOR DRAIN


HB200BWH

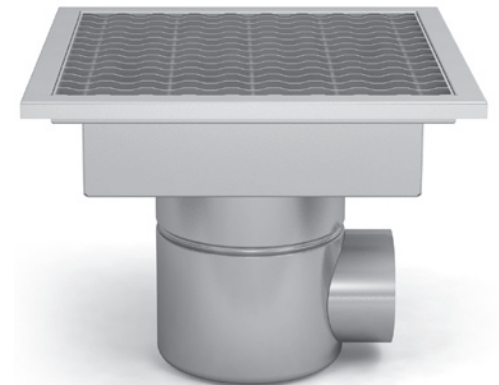

HB280BWV — BIN WASH FLOOR DRAIN

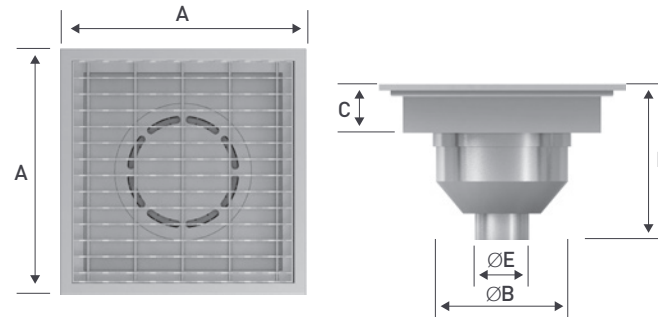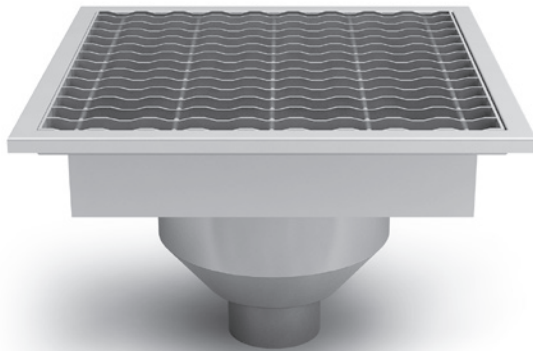

HB280BWH — BIN WASH FLOOR DRAIN

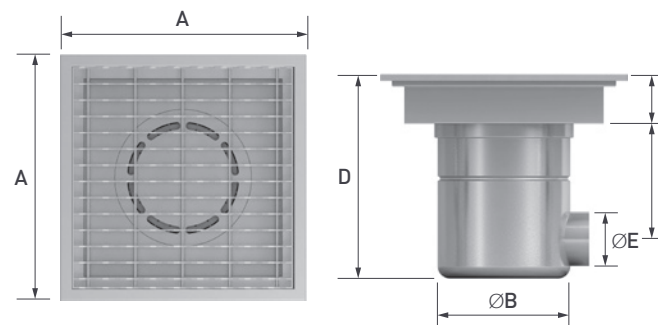

VERTICAL OUTLET



DRAIN DIMENSIONS

A	Bin Waste Channel Size	500mm x 500mm
B	Drain Body Diameter	270mm
C	Channel Height	100mm
D	Bin Waste Height	330mm
E	Outlet Diameter	110mm

DRAIN WEIGHT

MODEL	Weight (Kg)
HB200BWV	13

HORIZONTAL OUTLET



DRAIN DIMENSIONS

A	Bin Waste Channel Size	500mm x 500mm
B	Drain Body Diameter	270mm
C	Channel Height	100mm
D	Bin Waste Height	420mm
E	Outlet Diameter	110mm
F	Outlet Center Height	235mm

DRAIN WEIGHT

MODEL	Weight (Kg)
HB200BWH	13



[illegible]This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

CONTACT DETAILS

HEAD OFFICE - ROODEPOORT

Physical Address

1331 Spyker Crescent
 Stormill Ext. 2 , Roodepoort
 South Africa

Contact Numbers

+27 (0)11 474 2644
 +27 (0)11 474 2647

E-mail

sales@herbish.co.za

AGENTS - SOUTH AFRICA

Cape Town

Craig Ward

Tel. +27 (0)21 593 0529 | Mob. +27 (0)83 243 7910

KwaZulu-Natal

Antonio Ravell

Mob. +27 (0)83 273 6299

Port Elizabeth

Gary Bergensen

Tel. +27 (0)41 581 6851 | +27 (0)82 652 5445

AGENTS - AFRICA

Botswana / Swaziland / Zambia

Ward Distributors

Tel. +27 (0)11 793 7343 / 4 | Tel. +27 (0)11 793 734

Namibia

O'Behrens & Co. (OBECO)

Tel. +264 61 276300

Zimbabwe

Tel. +263 474 4550

Mozambique, Malawi, Ghana, Uganda,

Nigeria, Angola

Hudara Trading

Tel. +2776 686 9690



www.herbish.co.za

"Simply Better Drainage!"



www.herbish.co.za