



"Simply Better Drainage!"


www.herbish.co.za

Herbisch® Drainage Systems has been involved in the design and manufacture of stainless steel floor drains, grease traps, strip channels, shower channels, and linear floor channels for over 20 years.

Specified by architects, engineers and plumbers, our comprehensive range provides high quality drainage solutions requiring minimum maintenance and offering maximum corrosion resistance.

01	HBSD100 FLOOR DRAIN RANGE	01
02	HB125 FLOOR DRAIN RANGE	02
03	HB200 FLOOR DRAIN RANGE	05
04	HB250 FLOOR DRAIN RANGE	10
05	HB280 FLOOR DRAIN RANGE	13
06	HB HYGIENIC VINYL FLOOR DRAIN RANGE	18

Note: In our quest to continuously improve our products, some designs and sizes may be slightly adjusted.

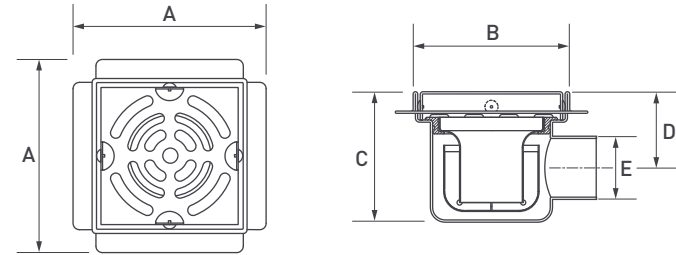

LID DESIGN OPTIONS



Polished Lid (Standard)



Brushed Lid*



Powder Coated Lid*

DRAIN DIMENSIONS

A	Flange Size	152mm x 152mm
B	Drain Body Diameter	122mm
C	Drain Height	145mm
D	Outlet Diameter	50mm
E	Outlet Center Height	60mm

(Client specification*)

HBSD100

SHOWER DRAIN

Herbish® HBSD100 Shower drains are designed in collaboration with leading architects and designers.

Manufactured entirely of 304ss, they are corrosion resistant and hygienic.

APPLICATIONS

- Suitable for tiled and epoxy floor installations
- Available in both square and round flange
- Designed for both domestic and commercial wet room applications

MATERIALS & FINISHES

- Manufactured in 304 and 316 grade stainless steel
- 3 stylish drain cover finish options
- Supplied standard with ABS plastic basket with and a 75mm ABS plastic water seal
- Supplied Standard with 50mm diameter outlet

PERFORMANCE

- Excellent corrosion resistance
- Hygienic
- SANS10400 compliant 75mm water seal
- Suitable for large format shower roses

INSTALLATION

- Easy to install
- Easy to clean and maintain





HB125 FLOOR DRAIN RANGE

The Herbish® HB125 range of floor drains has been re-designed to keep up with the latest worldwide developments in floor drainage.

Manufactured in 304ss, this metal pressed floor drain is hygienic and stain resistant.

APPLICATIONS

- Suitable for tiled and epoxy floor installations
- Available in both square and round flange
- Designed for both domestic and commercial wet room applications

MATERIALS & FINISHES

- Manufactured in 304 and 316 grade stainless steel
- A choice of horizontal or vertical outlets
- 3 stylish drain cover finish options
- Supplied standard with ABS plastic basket with and a 75mm ABS plastic water seal
- Supplied Standard with 50mm outlet but 76mm diameter outlets are also available*


PERFORMANCE

- Excellent corrosion resistance
- Hygienic
- High flow rate performance
- SANS10400 compliant 75mm water seal
- No direct access to the sewer line during routine maintenance


INSTALLATION

- Easy to install
- Tamper-proof fixings for the cover are standard
- Easy to clean and maintain

HB125V — SQUARE FLANGE FLOOR DRAIN

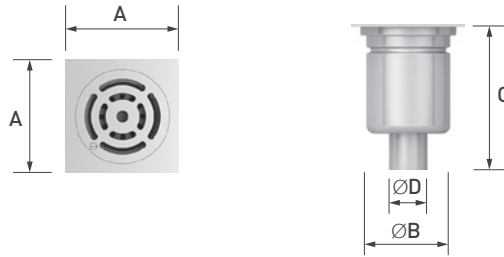

HB125H — SQUARE FLANGE FLOOR DRAIN

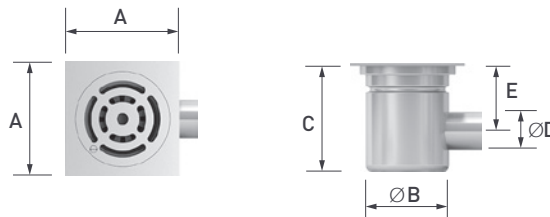

Standard Lid



Lid A*

LID DESIGN OPTIONS

Special Orders Only*

VERTICAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	150mm x 150mm
B	Drain Body Diameter	110mm
C	Drain Height	190mm
D	Outlet Diameter	50mm/76mm*

(Client specification*)

HORIZONTAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	150mm x 150mm
B	Drain Body Diameter	110mm
C	Drain Height	145mm
D	Outlet Diameter	50mm/76mm*
E	Outlet Center Height	90mm

(Client specification*)



VERTICAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	150mm x 150mm
B	Water Proofing Flange Size	200mm x 200mm
C	Drain Body Diameter	110mm
D	Drain Height	190mm
E	Outlet Diameter	50mm/76mm*
F	Height Adjustment	20mm - 60mm

(Client specification*)

HORIZONTAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	150mm x 150mm
B	Water Proofing Flange Size	200mm x 200mm
C	Drain Body Diameter	110mm
D	Drain Height	145mm
E	Outlet Diameter	50mm/76mm*
F	Outlet Centre Diameter	70mm
G	Height Adjustment	20mm - 60mm



(Client specification*)



ADJUSTABLE FLOOR DRAIN

With a 60mm adjustment and is able to rotate and tilt to suit your floor.


HB125VA

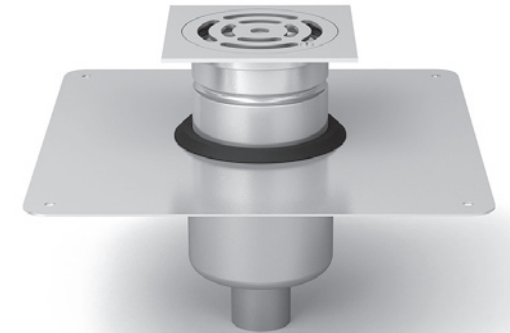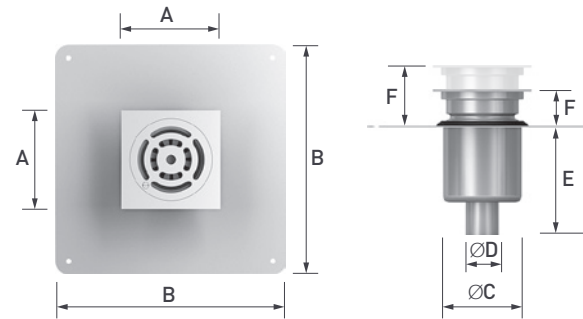

ADJUSTABLE FLOOR DRAIN

With a 60mm adjustment and is able to rotate and tilt to suit your floor.

HB125HA

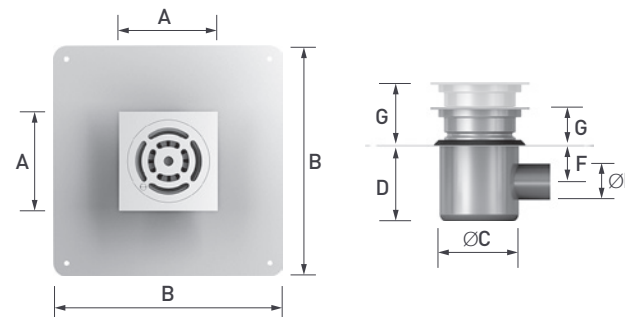

LID DESIGN OPTIONS

Special Orders Only*



Standard Lid



Lid A*



HB200

FLOOR DRAIN RANGE

The Herbish® HB200 range of floor drains has been designed to keep up with the latest worldwide developments in floor drainage.

Manufactured in 304ss, this metal pressed floor drain is hygienic and stain resistant.

APPLICATIONS

- Suitable for tiled and epoxy floor installations
- Available in both square and round flange
- Designed for both domestic and commercial wet room applications

MATERIALS & FINISHES

- Manufactured in 304 and 316 grade stainless steel
- A choice of horizontal or vertical outlets
- Supplied standard with ABS plastic basket with and a 75mm ABS plastic water seal
- Supplied standard with a 110mm outlet

PERFORMANCE

- Excellent corrosion resistance
- Hygienic
- High flow rate performance
- SANS10400 compliant 75mm water seal
- No direct access to the sewer line during routine maintenance

INSTALLATION

- With a 60mm adjustment and able to rotate and tilt to suit your floor, installation is easy
- Tamper-proof fixings for the cover are standard
- Easy to clean and maintain

VERTICAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	240mm x 240mm
B	Drain Body Diameter	185mm
C	Drain Height	210mm
D	Outlet Diameter	110mm

HORIZONTAL OUTLET




DRAIN DIMENSIONS


A	Flange Size	240mm x 240mm
B	Drain Body Diameter	185mm
C	Drain Height	210mm
D	Outlet Diameter	110mm
E	Outlet Center Height	140mm



SQUARE FLANGE FLOOR DRAIN ————— HB200V

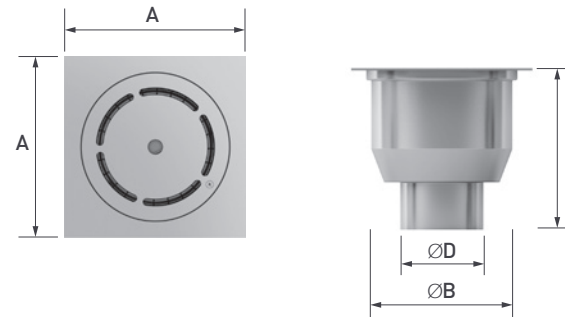


SQUARE FLANGE FLOOR DRAIN ————— HB200H

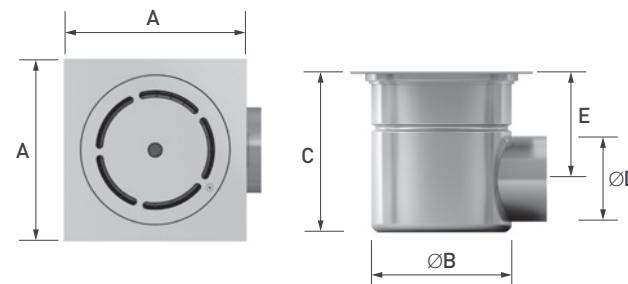


HB200VA — ADJUSTABLE FLOOR DRAIN

With a 60mm adjustment and is able to rotate and tilt to suit your floor.

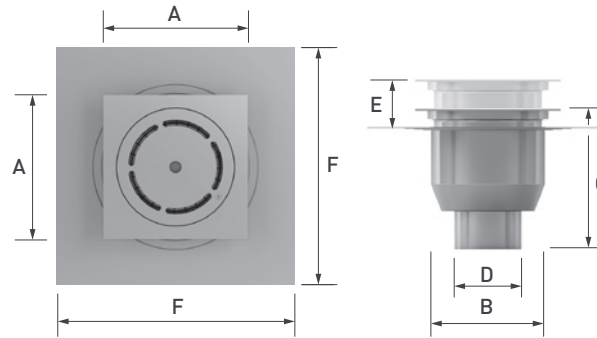

HB200HA — ADJUSTABLE FLOOR DRAIN

With a 60mm adjustment and is able to rotate and tilt to suit your floor.

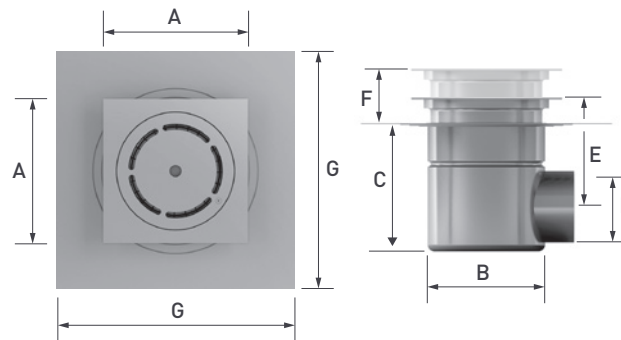

VERTICAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	240mm x 240mm
B	Drain Body Diameter	185mm
C	Drain Height	220mm
D	Outlet Diameter	110mm
E	Height Adjustment	20mm - 60mm
F	Waterproofing Flange Size	400mm x 400mm

HORIZONTAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	240mm x 240mm
B	Drain Body Diameter	185mm
C	Total Drain Height	245mm
D	Outlet Diameter	110mm
E	Outlet Center Height	150mm
F	Height Adjustment	20mm - 60mm
G	Waterproofing Flange Size	400mm x 400mm



VERTICAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	240mm x 240mm
B	Drain Body Diameter	185mm
C	Drain Height	330mm
D	Side Inlet Diameter	50mm/76mm*
E	Outlet Diameter	110mm
F	Side Inlet Center Height	100mm

(Client specification*)

HORIZONTAL OUTLET



DRAIN DIMENSIONS



A	Flange Size	240mm x 240mm
B	Drain Body Diameter	185mm
C	Drain Height	320mm
D	Side Inlet Diameter	50mm/76mm*
E	Outlet Diameter	110mm
F	Outlet Center Height	250mm
G	Side Inlet Center Height	100mm

(Client specification*)



+ SIDE INLETS FLOOR DRAIN



Standard with 50mm inlets, 76mm diameter inlets are also available*



HB200SV

+ SIDE INLETS FLOOR DRAIN


Standard with 50mm inlets, 76mm diameter inlets are also available*



HB200SH


HB200SVA — ADJUSTABLE + SIDE INLETS FLOOR DRAIN

With a 60mm adjustment and is able to rotate and tilt to suit your floor.
Standard with 50mm inlets but 76mm diameter inlets are also available*

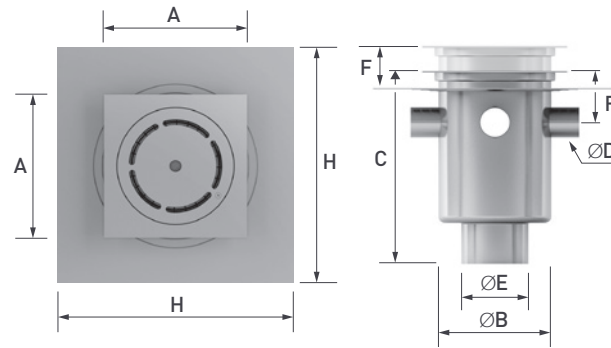

HB200SHA — ADJUSTABLE + SIDE INLETS FLOOR DRAIN

With a 60mm adjustment and is able to rotate and tilt to suit your floor.
Standard with 50mm inlets but 76mm diameter inlets are also available*

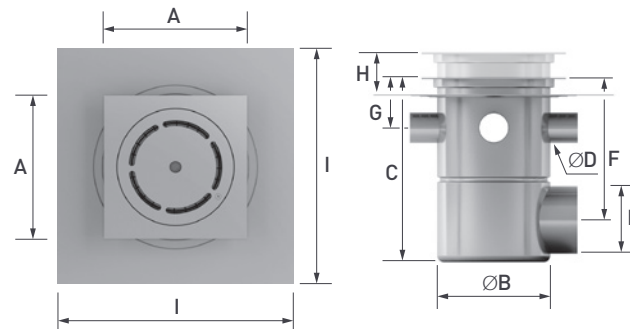

VERTICAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	240mm x 240mm
B	Drain Body Diameter	185mm
C	Drain Height	220mm
D	Side Inlet Diameter	50mm/76mm*
E	Outlet Diameter	110mm
F	Side Inlet Center Height	83mm
G	Height Adjustment	20mm - 60mm
H	Waterproofing Flange Size	400mm x 400mm

(Client specification*)

HORIZONTAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	240mm x 240mm
B	Drain Body Diameter	185mm
C	Total Drain Height	330mm
D	Side Inlet Diameter	50mm/76mm*
E	Outlet Diameter	110mm
F	Outlet Center Height	150mm
G	Side Inlet Center Height	100mm
H	Height Adjustment	20mm - 60mm
I	Waterproofing Flange Size	400mm x 400mm

(Client specification*)





HB250 FLOOR DRAIN RANGE

The Herbish® HB250 + Waterproofing flange range of floor drains has been designed to keep up with the latest worldwide developments in floor drainage.

Manufactured in 304ss, this metal pressed floor drain is hygienic and stain resistant.

APPLICATIONS

- Suitable for tiled and epoxy floor installation
- Available only with a square flange
- Designed for both domestic and commercial wet room applications

MATERIALS & FINISHES

- Manufactured in 304 and 316 grade stainless steel
- Optional 50mm side inlet above or below waterproofing flange
- Supplied standard with a stainless steel strainer and a 75mm ABS plastic water seal
- Supplied standard with a 110mm outlet

PERFORMANCE


- Excellent corrosion resistance
- Hygienic
- High flow rate performance
- SANS10400 compliant 75mm water seal
- No direct access to the sewer line during routine maintenance

INSTALLATION

- Tamper-proof fixings for the cover are standard
- Easy to clean and maintain

HB250HST — + WATERPROOFING FLANGE FLOOR DRAIN

With a side inlet above the waterproofing flange

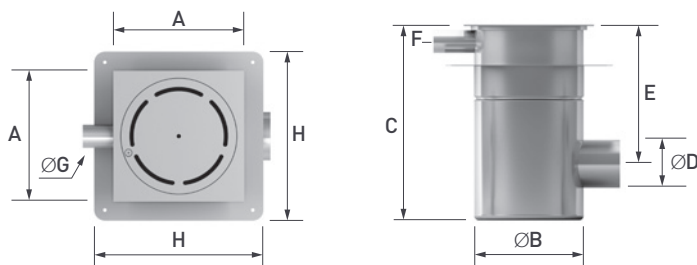

HORIZONTAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	310mm x 310mm
B	Drain Body Diameter	260mm
C	Drain Height	465mm
D	Outlet Diameter	110mm
E	Outlet Center Height	335mm
F	Side Inlet Center Height	40mm
G	Side Inlet Diameter	50mm
H	Waterproofing Flange	400mm x 400mm



HORIZONTAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	310mm x 310mm
B	Drain Body Diameter	260mm
C	Drain Height	465mm
D	Outlet Diameter	110mm
E	Outlet Center Height	240mm
F	Height Adjustment	20mm-60mm
G	Waterproofing Flange Offset	60mm
H	Waterproofing Flange Size	400mm x 400mm

HORIZONTAL OUTLET




DRAIN DIMENSIONS

A	Flange Size	310mm x 310mm
B	Drain Body Diameter	260mm
C	Total Drain Height	465mm
D	Outlet Diameter	110mm
E	Outlet Center Height	240mm
F	Side Inlet Center Height	120mm
G	Side Inlet Diameter	50mm
H	Height Adjustment	20mm-60mm
I	Waterproofing Flange Offset	60mm
J	Waterproofing Flange Size	400mm x 400mm




ADJUSTABLE FLOOR DRAIN

With a 60mm adjustment and is able to rotate and tilt to suit your floor.

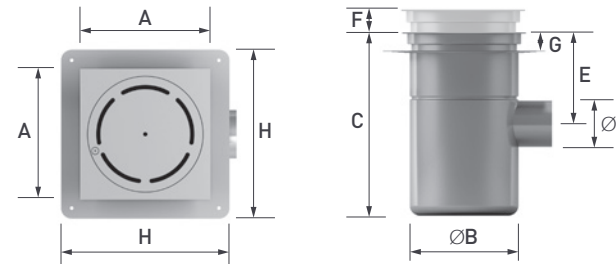

ADJUSTABLE FLOOR DRAIN

With a 60mm adjustment and is able to rotate and tilt to suit your floor and a side inlet below the waterproofing flange

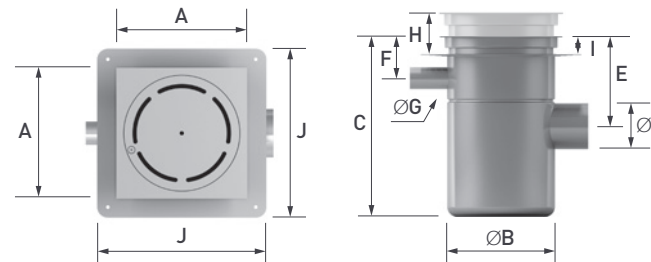



HB280

FLOOR DRAIN RANGE

The Herbish® HB280 range of floor drains has been designed to keep up with the latest worldwide developments in floor drainage.

Manufactured in 304ss, this metal pressed floor drain is hygienic and stain resistant.

APPLICATIONS

- Suitable for tiled and epoxy floor installation
- Available only with a square flange
- Designed for both domestic and commercial wet room applications

MATERIALS & FINISHES

- Manufactured in 304 and 316 grade stainless steel
- A choice of horizontal or vertical outlets
- Supplied standard with a stainless steel strainer and a 75mm ABS plastic water seal
- Supplied standard with a 110mm outlet

PERFORMANCE

- Excellent corrosion resistance
- Hygienic
- High flow rate performance
- SANS10400 compliant 75mm water seal
- No direct access to the sewer line during routine maintenance

INSTALLATION

- Easy to install
- Tamper-proof fixings for the cover are standard
- Easy to clean and maintain

VERTICAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	305mm x 305mm
B	Drain Body Diameter	270mm
C	Drain Height	230mm
D	Outlet Diameter	110mm

HORIZONTAL OUTLET





DRAIN DIMENSIONS


A	Flange Size	305mm x 305mm
B	Drain Body Diameter	270mm
C	Drain Height	315mm
D	Outlet Diameter	110mm
E	Outlet Center Height	235mm



SQUARE FLANGE FLOOR DRAIN ————— HB280V




SQUARE FLANGE FLOOR DRAIN ————— HB280H




HB280VA — ADJUSTABLE FLOOR DRAIN

With a 60mm adjustment and is able to rotate and tilt to suit your floor.

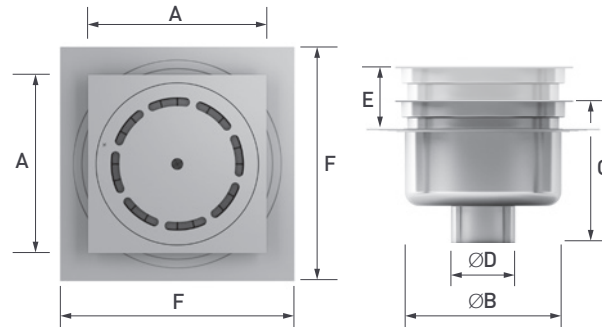

HB280HA — ADJUSTABLE FLOOR DRAIN

With a 60mm adjustment and is able to rotate and tilt to suit your floor.

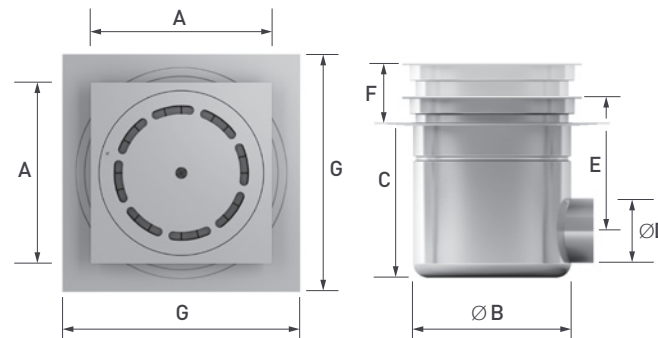

VERTICAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	305mm x 305mm
B	Drain Body Diameter	270mm
C	Drain Height	230mm
D	Outlet Diameter	110mm
E	Height Adjustment	20mm - 60mm
F	Waterproofing Flange Size	400mm x 400mm

HORIZONTAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	305mm x 305mm
B	Drain Body Diameter	270mm
C	Total Drain Height	315mm
D	Outlet Diameter	110mm
E	Outlet Center Height	235mm
F	Height Adjustment	20mm - 60mm
G	Waterproofing Flange Size	400mm x 400mm



VERTICAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	305mm x 305mm
B	Drain Body Diameter	270mm
C	Drain Height	230mm
D	Outlet Diameter	110mm
E	Height Adjustment	20mm - 60mm
F	Waterproofing Flange Size	400mm x 400mm

HORIZONTAL OUTLET




DRAIN DIMENSIONS

A	Flange Size	305mm x 305mm
B	Drain Body Diameter	270mm
C	Total Drain Height	315mm
D	Outlet Diameter	110mm
E	Outlet Center Height	235mm
F	Height Adjustment	20mm - 60mm
G	Waterproofing Flange Size	400mm x 400mm




ADJUSTABLE FLOOR DRAIN

HB280VA

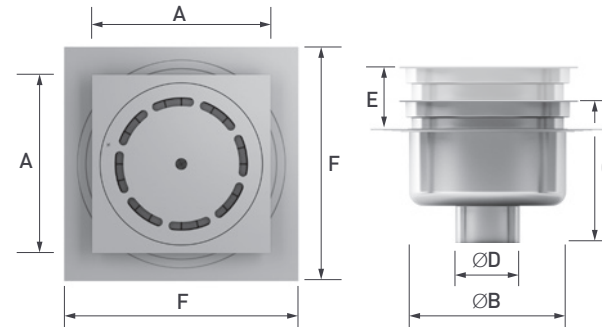


ADJUSTABLE FLOOR DRAIN

HB280HA

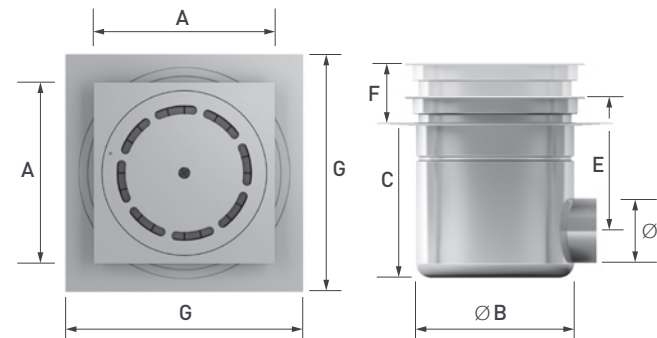


HB280SVA — ADJUSTABLE + SIDE INLETS FLOOR DRAIN

With a 60mm adjustment and is able to rotate and tilt to suit your floor.
Standard with 50mm inlets, 76mm diameter inlets are also available*

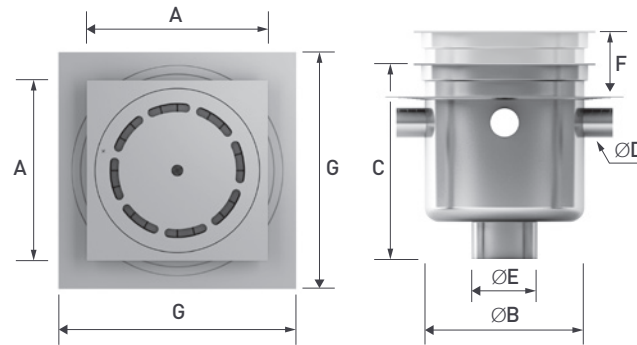

HB280SHA — ADJUSTABLE + SIDE INLETS FLOOR DRAIN

With a 60mm adjustment and is able to rotate and tilt to suit your floor.
Standard with 50mm inlets, 76mm diameter inlets are also available*

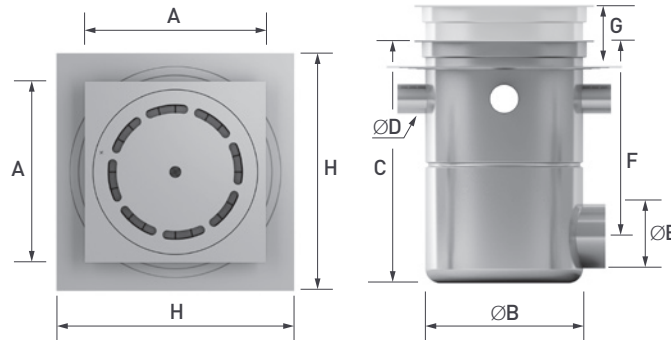

VERTICAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	305mm x 305mm
B	Drain Body Diameter	270mm
C	Drain Height	330mm
D	Side Inlet Diameter	50mm/76mm*
E	Outlet Diameter	110mm

(Client specification*)

HORIZONTAL OUTLET



DRAIN DIMENSIONS

A	Flange Size	305mm x 305mm
B	Drain Body Diameter	270mm
C	Drain Height	415mm
D	Side Inlet Diameter	50mm/76mm*
E	Outlet Diameter	110mm
F	Outlet Center Height	335mm

(Client specification*)





 Green Drain™



HYGIENIC VINYL FLOOR DRAIN RANGE

Herbish® Hygienic Vinyl floor drains are full flow floor drains to be used in conjunction with vinyl flooring and are available in a range of 7 sizes that come with a standard water seal. We suggest an optional Green Drain™ water seal for high hygienic applications because it blocks pathogens, gases, odours and pests.

Herbish® Hygienic Vinyl Floor drains are manufactured entirely of 304ss, are corrosion resistant. Depending on Client's requirements they may be manufactured in 316ss and in thicker material to suit customer requirements.

APPLICATIONS

- Hospitals, Clinics, and high hygiene areas
- Suitable for vinyl floor installations
- Designed for both domestic and commercial applications

MATERIALS & FINISHES

- Manufactured in 304 and 316 grade stainless steel
- Available in a round flange only
- Supplied standard with Green Drain™ water seal for very high hygienic applications
- Designed to fit in HDPE piping. This allows the drain to adjust to suit floor level
- Floor drains can be ordered with or without strainers

PERFORMANCE

- Excellent corrosion resistance
- Hygienic

INSTALLATION

- Easy to install
- Tamper-proof fixings for the cover are standard
- Easy to clean and maintain

HYGIENIC HBV — VINYL FLOOR DRAINS



HBV50V



HBV75V



HBV100V

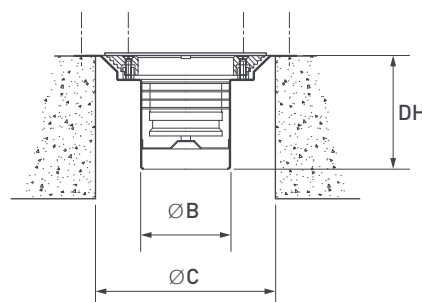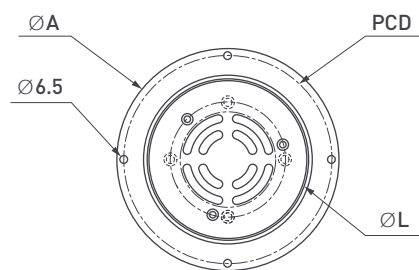

VERTICAL OUTLET



DESCRIPTION

ØA	Outer Flange Diameter
ØB	Connection Diameter
ØC	Core Size
DH	Drain Overall Height
ØL	Lid Diameter
PCB	Fixing Down Screws Pitch Diameter
T	Lid Material Thickness

DRAIN DIMENSIONS

	HBV50V	HBV75V	HBV100V
A	185mm	185mm	220mm
B	50.4mm	75.2mm	110.5mm
C	150mm	150mm	180mm
DH	90mm	95mm	115mm
L	135mm	135mm	170mm
PCD	175mm	175mm	210mm
T	2mm	2mm	2mm



VERTICAL OUTLET



DRAIN DIMENSIONS

A	Flange Diameter	210mm
B	Drain Body Diameter	110mm
C	Drain Height	200mm
D	Outlet Diameter	50mm/76mm*

(Client specification*)

HORIZONTAL OUTLET



DRAIN DIMENSIONS


A	Flange Size	150mm x 150mm
B	Drain Body Diameter	110mm
C	Drain Height	145mm
D	Outlet Diameter	50mm/76mm*
E	Outlet Center Height	90mm

(Client specification*)




VINYL FLOOR DRAIN

HB125VV

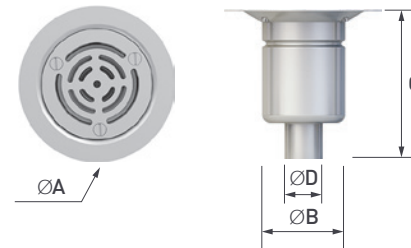

VINYL FLOOR DRAIN

HB125HV

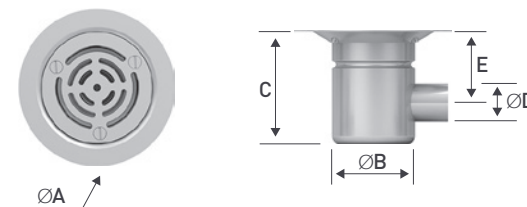

LID DESIGN OPTIONS

Special Orders Only*




Standard Lid




Lid A*

HB200VV — SQUARE FLANGE FLOOR DRAIN

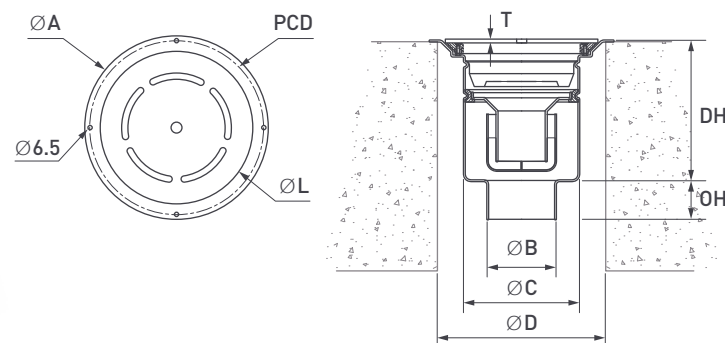

HB200HV — SQUARE FLANGE FLOOR DRAIN

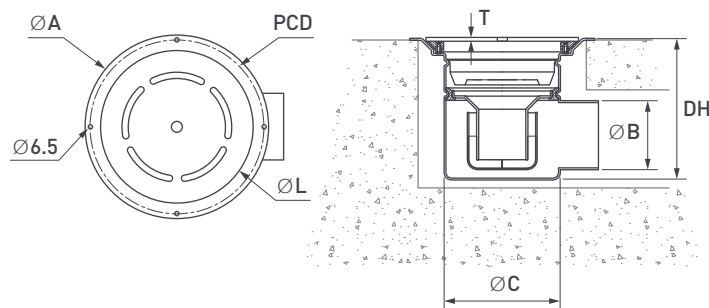

VERTICAL OUTLET



DRAIN DIMENSIONS

A	Outer Flange Diameter	295mm
B	Connection Diameter	110mm
C	Drain Diameter	185mm
D	Core Diameter	270mm
DH	Drain Overall Height	225mm
H	Outlet Height	225mm
L	Lid Diameter	245mm
PCB	Fixing Down Screws Pitch Diameter	280mm
T	Lid Material Thickness	6mm

HORIZONTAL OUTLET



DRAIN DIMENSIONS

A	Outer Flange Diameter	295mm
B	Connection Diameter	110mm
C	Drain Diameter	185mm
DH	Drain Overall Height	225mm
L	Lid Diameter	245mm
PCB	Fixing Down Screws Pitch Diameter	280mm
T	Lid Material Thickness	6mm

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.This image shows a single sheet of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

CONTACT DETAILS

HEAD OFFICE - ROODEPOORT

Physical Address

1331 Spyker Crescent
 Stormill Ext. 2 , Roodepoort
 South Africa

Contact Numbers

+27 (0)11 474 2644
 +27 (0)11 474 2647

E-mail

sales@herbish.co.za

AGENTS - SOUTH AFRICA

Cape Town

Craig Ward

Tel. +27 (0)21 593 0529 | Mob. +27 (0)83 243 7910

KwaZulu-Natal

Antonio Ravell

Mob. +27 (0)83 273 6299

Port Elizabeth

Gary Bergensen

Tel. +27 (0)41 581 6851 | +27 (0)82 652 5445

AGENTS - AFRICA

Botswana / Swaziland / Zambia

Ward Distributors

Tel. +27 (0)11 793 7343 / 4 | Tel. +27 (0)11 793 734

Namibia

O'Behrens & Co. (OBECO)

Tel. +264 61 276300

Zimbabwe

Tel. +263 474 4550

Mozambique, Malawi, Ghana, Uganda,

Nigeria, Angola

Hudara Trading

Tel. +2776 686 9690



www.herbish.co.za

"Simply Better Drainage!"



www.herbish.co.za